





Manual
for
Folding Garage (Car), Extra Large
2,8x6,4x2,65m

Large Plus Size Carport Assembly Instruction

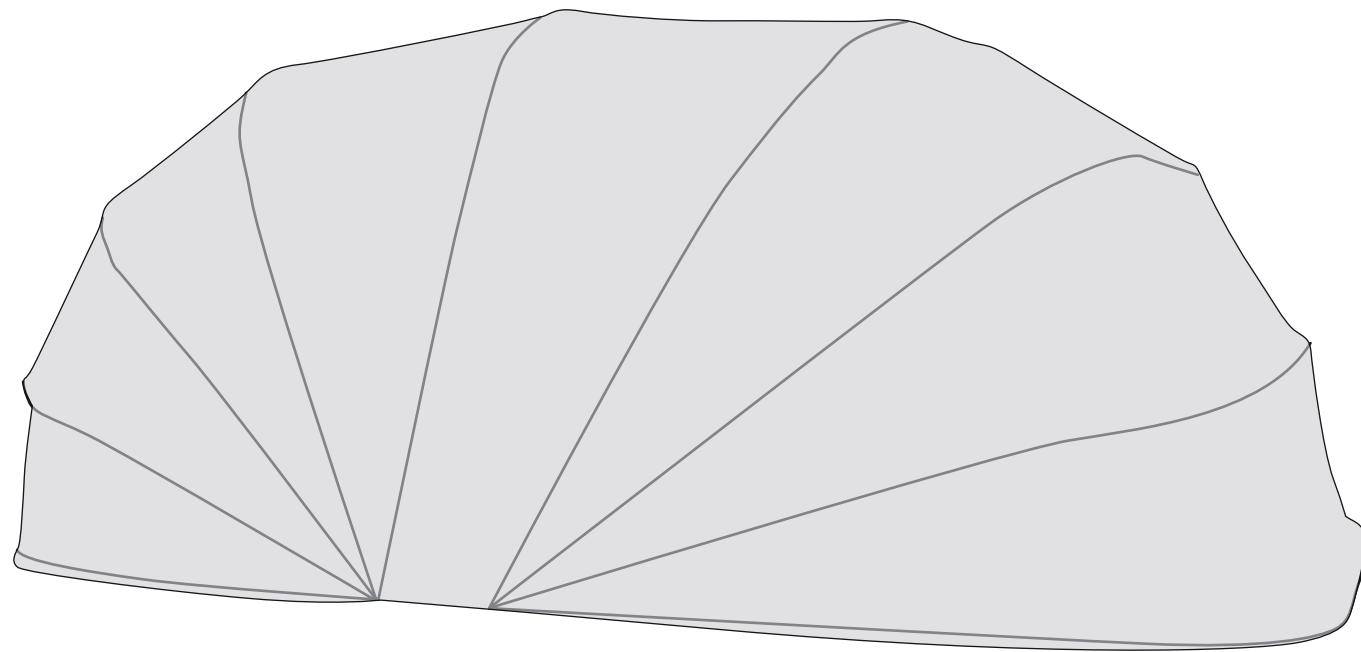

RECOMMENDED TOOLS

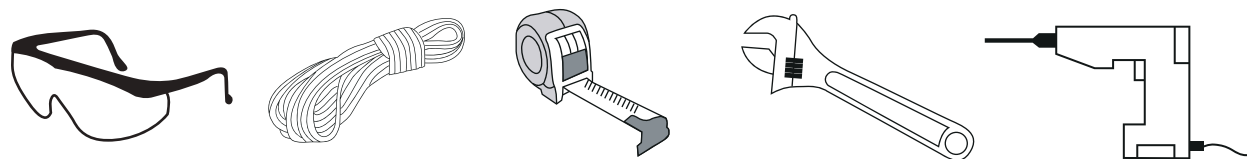

Please read instructions COMPLETELY before assembly. This shelter MUST be securely anchored. THIS IS A TEMPORARY STRUCTURE AND NOT RECOMMENDED AS A PERMANENT STRUCTURE. Before you start: 2+ individuals recommended for assembly, approximate time 1 hour.

When unpacking, make sure the product is intact. If any parts are missing or broken, please contact customer service immediately.

ATTENTION:

This shelter product is manufactured with quality materials. It is designed to fit the custom fabric cover included. This shelter offers storage and protection from damage caused by sunlight, rain, tree sap, and animal/bird excrement. Please anchor this structure properly. See manual for more anchoring details. Proper anchoring and keeping the cover secure are essential. This shelter is not recommended for severe weather conditions. Please read and understand the installation details, warnings, and cautions prior to beginning installation. If you have any questions, email/call the customer service listed below. Please keep the manual as reference.

DANGER:

Prior to installation, consult with all local municipal codes regarding installation of temporary shelters. Choose the location of your shelter carefully.

Danger: Keep away from electrical wires. Check for overhead utility lines, tree branches, or other structures. Check for underground pipes or wires before you dig. DO NOT install near roof lines or other structures that could shed debris onto your shelter. DO NOT hang objects from the roof or support cables.

WARNING:

Risk of fire. Do not smoke or use open flame devices (including grills, fire pits, deep fryers, smokers, or lanterns) in or around the shelter. DO NOT store flammable liquids (gasoline, kerosene, propane, etc.) in or around your shelter. Do not expose the top or sides of the shelter to open fire or other flame sources

WARNING:

The carport can only take light snow. Please remove the snow on top/take off the cover if the snow on top accumulates to 4"(10cm), otherwise the cover/carport may have a risk of breaking.

CAUTION:

The fabric is very thick. Inside temperature is higher than outside. In winter there may be steam condensation inside the cover top. Please open the air vent or cover to allow air flow into the carport to reduce condensation. Steam condensation does not mean rain comes through the cover.

CAUTION:

Use CAUTION when erecting the frame. Use safety goggles during installation.

PROPER ANCHORING AND INSTALLATION OF FRAME:

To ensure the safety and stability of your shelter, the frame must be securely anchored at all times. We recommend checking anchors periodically, especially after strong winds or severe weather, to confirm that the shelter remains stable.

Your shelter's cover can be removed and stored quickly if extreme weather (such as high winds or heavy snow) is expected in your area. For best performance and safety, always anchor the shelter securely and remove the cover when severe conditions are forecast.

REPLACEMENT PARTS,ASSEMBLY,SPECIAL ORDERS:

Genuine replacement parts and accessories are available from the manufacturer or authorized resellers. Delivery terms and lead times depend on regional distribution arrangements.

CARE AND CLEANING:

A tight cover ensures longer life and performance. Always maintain a tight cover. Loose fabric can accelerate deterioration of cover fabric. Immediately remove any accumulated debris/snow/rain from the roof structure with a broom, mop, or other soft-sided instrument. Use extreme caution when removing debris from the cover - always remove from outside the structure. DO NOT use hard-edged tools or instruments like rakes or shovels to remove debris. This could result in punctures to the cover. DO NOT use bleach or harsh abrasive products to clean the fabric cover. The cover is easily cleaned with mild soap and water.

WARRANTY:


This product is covered by a limited warranty against defects in materials and workmanship. If properly installed and used, the product and all associated parts are warranted to be free from manufacturing defects for the period specified below.

1 Year For Cover Fabric and Framework:

The warranty period is determined from the date of purchase (or date of shipment for direct orders). Please retain your purchase receipt as proof of purchase.


If the product or any associated parts are found to be defective at the time of receipt or during the warranty period, they will be repaired or replaced, at our discretion, at no charge to the original purchaser.

This warranty is provided in addition to, and does not affect, your statutory consumer rights.

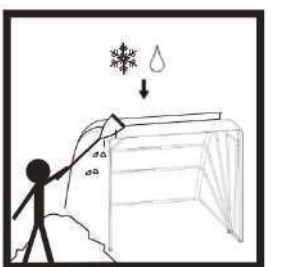


Large Plus Shelter Assembly Guide

Material List please open all cartons & make sure you got all the parts below:

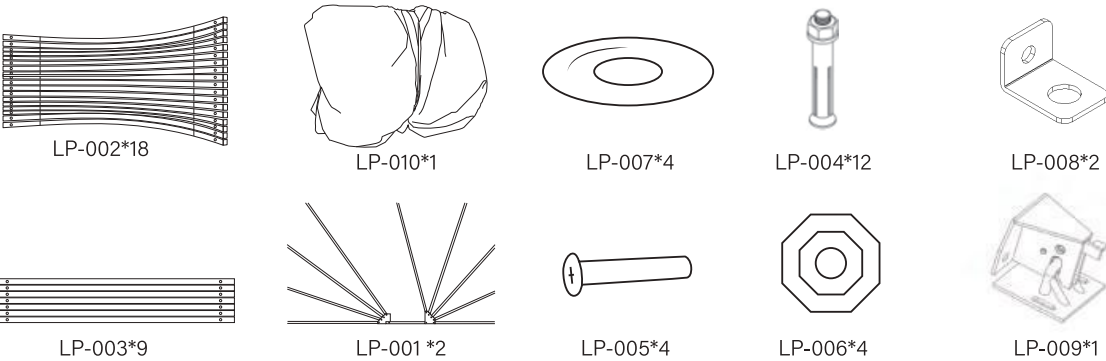

1


Assemble pipes with matching markings. The curved pipes at both ends connect to the straight pipe in the middle to create a structural frame assembly. All components within the same pipe section share identical markings.

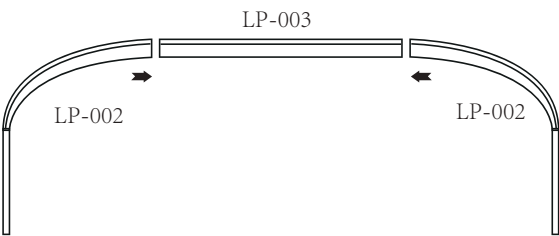

3


Place the straight pipe on both sides, with a distance of 2700mm between the two straight pipes.

Please note that you should not untie the ropes of the straight pipes before the curved pipes and straight pipes are installed.

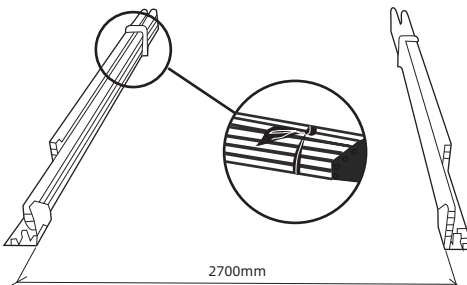


4

1. Spread out the tarp and find the side with the label on it.
2. Insert the No.1 bent pipe into the cover as the picture shows. Insert the No.1 bent pipe into the No.1 straight pipes on the left and right.

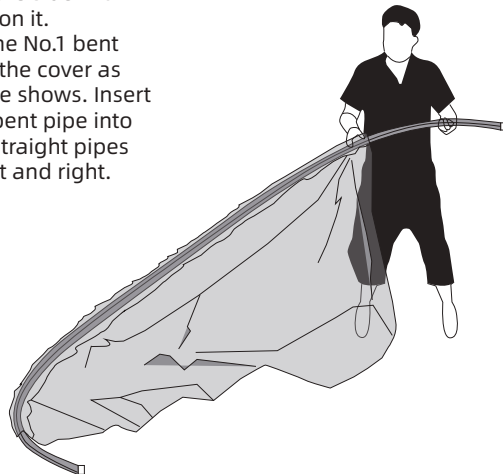

5

Connect the No. 1 bent pipe to the No. 1 straight pipes on both the left and right sides

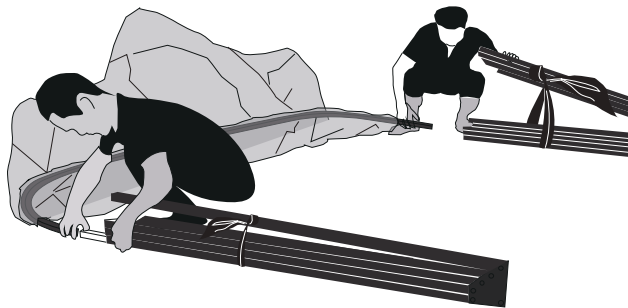


6

Continue assembling pipes No. 2 through No. 9 using the same insertion method shown previously, connecting each curved pipe to its corresponding straight pipe sections in sequence.




7

After inserting all the bent pipes, untie the ropes binding the straight pipes together, then deploy the shelter.

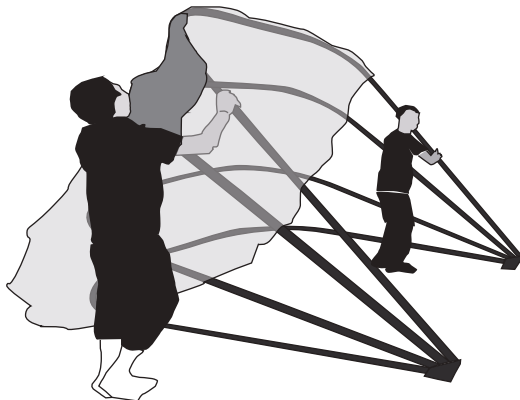


8

Use the Bolts to fix the garage on the floor.

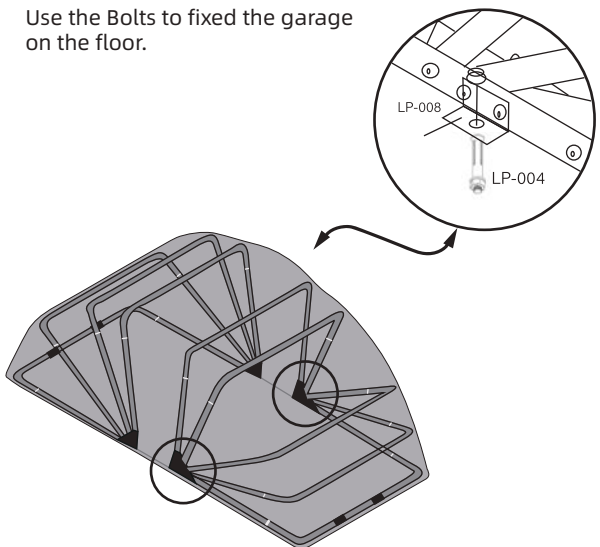

9

Use screws to install the floor anchor brackets on the garage frame and secure them to the ground surface.

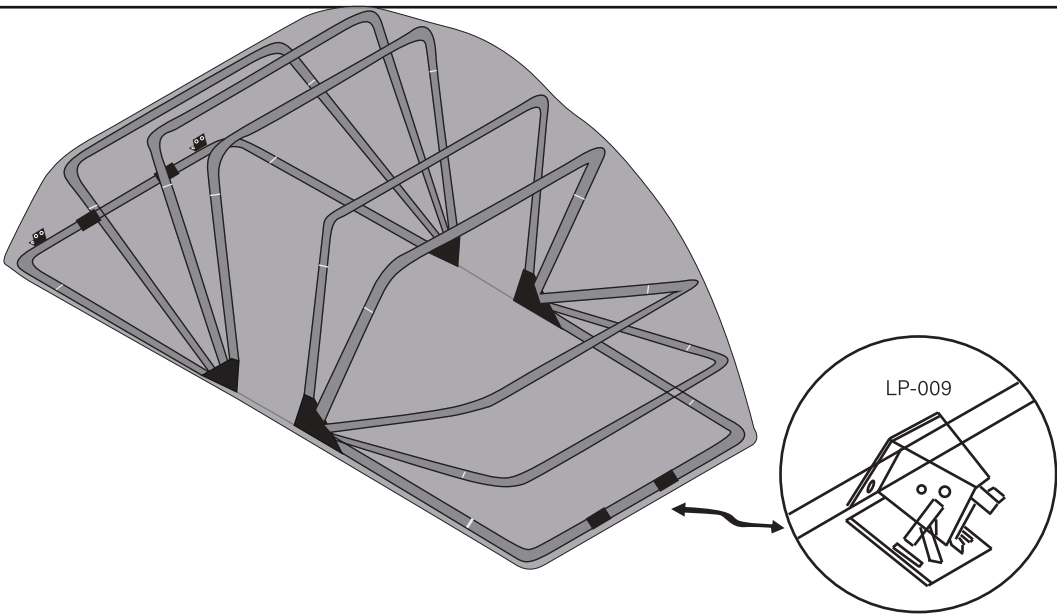

Contact information

Austria



Belgium



Croatia



Denmark



Estonia



Finland



France



Germany



Ireland



Italy



Latvia



Lithuania



Nederland



Norway



Poland



Portugal



Spain



Sweden



Switzerland



UK

